

Vintage

$P10R8\Omega$ **Code ZJ05051** 10" 25W

LOWS: Loose

MIDS: Firm

HIGHS: Smooth **OVERDRIVE:** Crunchy

_			
O		E 1	
~ \cdot	ına	E A STI	Irac'
OUL	II IU	Featu	ม ธอ.

Guitarist Description:

Rich, warm tone.


It accentuates the higher frequencies in sparkling detail.

Specifications				
Nominal Diameter	259	mm (10")		
Nominal Impedance	8	Ω		
Rated Power AES (1)	25	W		
Continuous Program Power (2)	50	W		
Sensitivity @ 1W/1m	94.2	dB		
Voice Coil Diameter	25	mm		
Voice Coil Winding Depth	8	mm		
Magnetic Gap Depth	6	mm		
Flux Density	0.96	Т		
Magnet Weight	200	g		
Net Weight	1.4	kg		

Thiele & Small Parameters (3)						
Re	6.68 Ω		Fs	97.0	Hz	
Qms	14.83		Mms	15.2	g	
Qts	1.62		Bxl	5.83	Tm	
Cms	177 μr	n/N	Sd	330.1	cm ²	
Vas	27.4 1		Le (1kHz)	0.54	mH	



Constructive Characteristics				
Magnet	AlNiCo			
Basket Material	Pressed Sheet Steel			
Voice Coil Winding Material	Copper			
Voice Coil Former Material	Kapton			
Cone Material	Paper			
Surround Treatment	No			
Surround Material	Paper - Integrated			
Dust Dome Material	Felt			

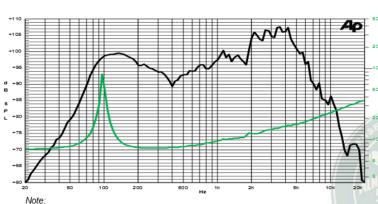

- 1 :Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
- 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
- 3: Thiele & Small parameters measured with laser system without preconditioning test
- 4: Drawing dimensions: mm
- 5: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle

